



*Picture for illustrative purposes only

DESIGN SPECIFICATIONS

- ✓ High quality, reliable and complete power unit
- ✓ Compact design
- ✓ Easy start and maintenance
- ✓ Fully tested for load, controls and safety shutdown functions
- ✓ Fully engineered with a range of optional extras and accessories.


230v 50 Hz	Generating Set Model		JSPSPO 6.6
Power Factor 1.0	Prime	kVA	6.6
		kW	6.6
	Standby	kVA	7.3
		kW	7.3

Prime: Continuous running at variable load for unlimited periods with 10% overload available for 1 hour in any 12 hour period. In accordance with ISO 8528, ISO 3046.
Standby: Continuous running at variable load for duration of an emergency. No overload is permitted on these ratings. In accordance with ISO 3046, BS 5514.

TECHNICAL DATA*			
Engine Model	Perkins 403A-11G1	Alternator	Mecc Alte
Number of Cylinders	3 in-line	Heat Rejection to Exhaust (Max)	8.0kW
Cubic Capacity	1.1 litre	Heat Rejection to Cooling System (Max)	9.5kW
Aspiration	Natural	Exhaust Temperature (Max)	420 deg C
Engine Speed (RPM)	1500 rpm	Combustion Air Flow (Max)	0.70 cu m/min
Frequency	50 Hz	Fuel Tank Capacity	100 litre
Amperage	28 amp	Fuel Consumption at Full Prime Rating	2.60 litre per hour

DIMENSIONS*	
Length (A)	1,325 mm
Width (B)	720 mm
Height (C)	1,215 mm
WEIGHT*	
Wet (with lube oil and coolant)	282 kg

SOUND LEVELS*			
Load	15m	7m	1m
100%	TBA	TBA	TBA
75%	TBA	TBA	TBA

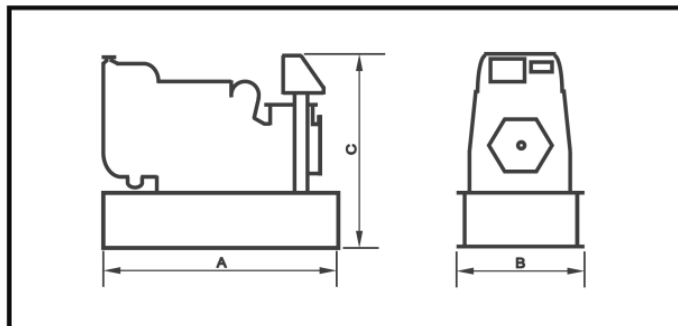

FEATURES*	Manual Start, Main Power Set		Automatic Start, Standby Set	
	Standard	Optional	Standard	Optional
Base Fuel Tank	✓		✓	
Bunded Base Fuel Tank		✓		✓
Oil, Fuel & Air Filters	✓		✓	
Coolant Water Heater			✓	
Lube Oil Drain	✓		✓	
Vibration isolated Control Panel	✓		✓	
Manual Start Control Panel	✓			
Automatic Start Control Panel			✓	
Integral 5A Battery Charger			✓	
Automatic Transfer Panel				✓
12 Months International Warranty	✓		✓	
Output Circuit Breaker	✓		✓	
CE Certification (Standard on UK / EU Models)	✓		✓	
Service / Maintenance Contracts / Remote Monitoring		✓		✓

*Specifications subject to change without notice

